


Acetylene

Trade N Go Gas™ range product information

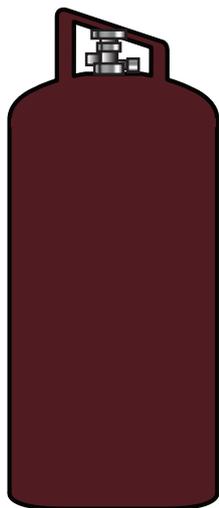

PACKAGING

Valves

The shut off valves are manufactured according to AS 2473. When opening the valve always open fully to activate the back seat valve which will prevent leakage.

All cylinders are fitted with a lead fusible protection plug. This will melt if the temperature of the plug exceeds 1000C.

Cylinders

Coregas cylinders are designed, built and tested according to Australian Standard: AS 2030 Part 1. Each cylinder has a permanent guard (with hand grip) to protect the valve from accidental damage.

Equipment

Only regulators, manifolds and ancillary equipment rated for the appropriate pressure and compatible with the relevant gas shall be connected to, or downstream from these cylinders/packs.

NB: Container sizes may vary from state to state.

All cylinders dimensions are approximate. Slight variations to the table below may occur due to manufacturing tolerances. Typical heights include the valve.

For technical support
please contact the
Coregas customer
service centre:
1800 807 203

Specification	Acetylene
Size	D
Contents (m3)	1.0
Cylinder Water Capacity (l)	7.2
Average Weight - full (kg)	13.6
Average Weight - empty (kg)	12.5
Pressure kPa @ 15°C	1,850
Outlet Connection	Type 20
Dimensions (mm) Height	590
Dimensions (mm) Diam/Width	160

CLASSIFICATIONS	TYPICAL ANALYSIS	PHYSICAL CHARACTERISTICS
UN No: 1001	Acetylene ≥ 98.0%	Chemical Formula: C ₂ H ₂
EAC / Hazchem: 2SE		Colour: Colourless
Class: 2.1		Odour: Garlic-like odour
SDS: 20831003		
Above as per ADG 7		



Phone: 1800 807 203
Email: customer.services@coregas.com

www.coregas.com.au